


XL600-CPR-B

CAT 6 Outdoor Water-blocking Network Cables



- 305.0 m (1000 ft)/carton UTP CAT6, power over Ethernet, compatible with one cable
- High-purity Oxygen-Free Copper conductor material
- Customized water-blocking outer sheath; meet CE CPR Eca or ANSI UL CM flame retardant class certified

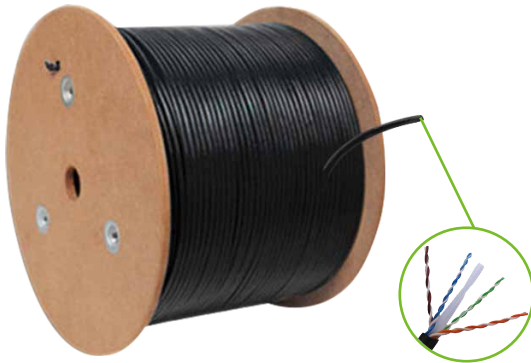

High-speed



Water-blocking



Oxygen-Free
Copper

Conductor

Material	Oxygen-free copper (99.99% purity)
Diameter	1/0.56mm (0.55mm±0.01)
American Wire Gauge	23AWG

Insulation

Material	HDPE
Min. Average Thickness	0.21 mm
Diameter	1mm±0.05 mm
Color (4 Pairs)	Blue, white/blue; orange, white/orange; green, white/green; brown, white/brown

Separator

Material	PE
Specification	Translucent 4.5×0.4 mm

Rip Cord

Material	Polyester
Specification	500D

Sheath

Material	Customized water-blocking outer sheath
Min. Average Thickness	0.43 mm
Diameter	6.3 mm ± 0.5 mm
Color	Black (optional)

Electrical

Max. DC Resistance of a Single Conductor	9.38Ω/100 m
Min. Insulation Resistance	5000MΩ·km
Max. DC Resistance Unbalance	≤5%
Dielectric Strength	No breakdown with 1KV DC for 1 min

Transmission

Characteristic Impedance (1-250MHz)	100 ± 15Ω
-------------------------------------	-----------

Mechanical

Tensile Strength	Sheath≥10 MPa, insulation≥16 MPa
Elongation at Break	Sheath≥125%, insulation≥300%
Installation Bending Radius	>8 times of outer cable diameter
Conductor Elongation at Break	≥10%

Environmental

Shrinkage of Insulation	≤5%
Color Migration Resistance of Insulation	No migration
Sheath Tensile Strength and Elongation at Break after Aging	≥8 MPa, ≥100%
Low Temperature Bending Test	No cracking after the test
Heat Shock Test	No cracking after the test
Operation Temperature	-20°C to +60°C (-4°F to 140°F)
Installation Temperature	0°C to +50°C (32°F to 122°F)
Storage Temperature and Humidity	-10°C to +40°C (14°F to 104°F), <60% (RH)

Certification

Certification	CPR Eca
---------------	---------

Dimensions

